

# ES2000 Series

Specifications: Model ES2000

Electrical Rating:

SPDT Electrical Load:  
 1/10 HP @ 120 VAC  
 28 VA Pilot Duty @ 24 VAC  
 125 VA Pilot Duty @ 120 VAC  
 SPST Electrical Load:  
 3 A Resistive @ 120 VAC

Electrical Switch:

Customer Specified,  
 Snap Acting Contacts.

Electrical Connectors:

Common (C), Normally Open (NO),  
 Normally Closed (NC)  
 Customer Specified

Control Set Point:

Factory Calibrated;  
 Customer Specified (0.10-5.00" W.C.)

Maximum Pressure:

3 PSI

Operating Temperature Range:

-40° to 190°F

Recommended Operating Position:

Diaphragm Vertical

Sample Line Connector:

Negative: .260 OD Straight  
 Connector  
 With  $\phi$ .016 Bleedhole  
 And Customer Specified  
 Flow Restricting Orifice



Bracket:

Angle, Offset, Direct Mount and  
 Custom Brackets Available

Required Bracket Screw:

A #6 thread cutting screw with  
 spaced threads, a blunt point,  
 tapered entering threads, a single  
 wide cutting edge, and a chip  
 cavity.

UL File No: MH29434

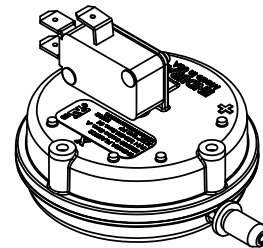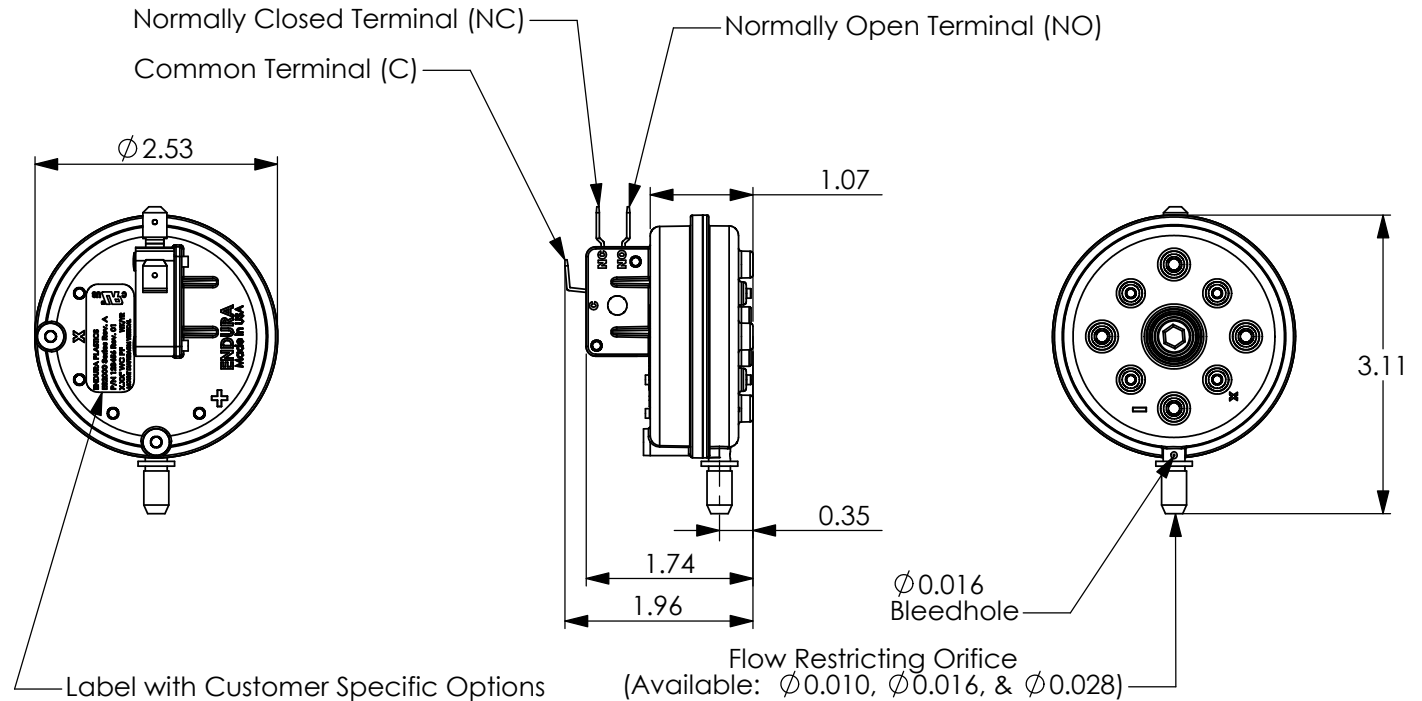

**FOR REFERENCE ONLY!**

DIMENSIONS ARE IN INCHES

SCALE: 1:2

**Endura**  
**PLASTICS INC.**

7955 Chardon Road  
 Kirtland, Ohio 44094-9531

**Phone:** (440) 951-4466

**Fax:** (440) 256-3053

**Toll Free:** (800) 376-4466

[www.endura.com](http://www.endura.com)